




GH Series

Hands Free Audio

Two Wire Digital Apartment Intercom


16 entries and 500 apartment stations

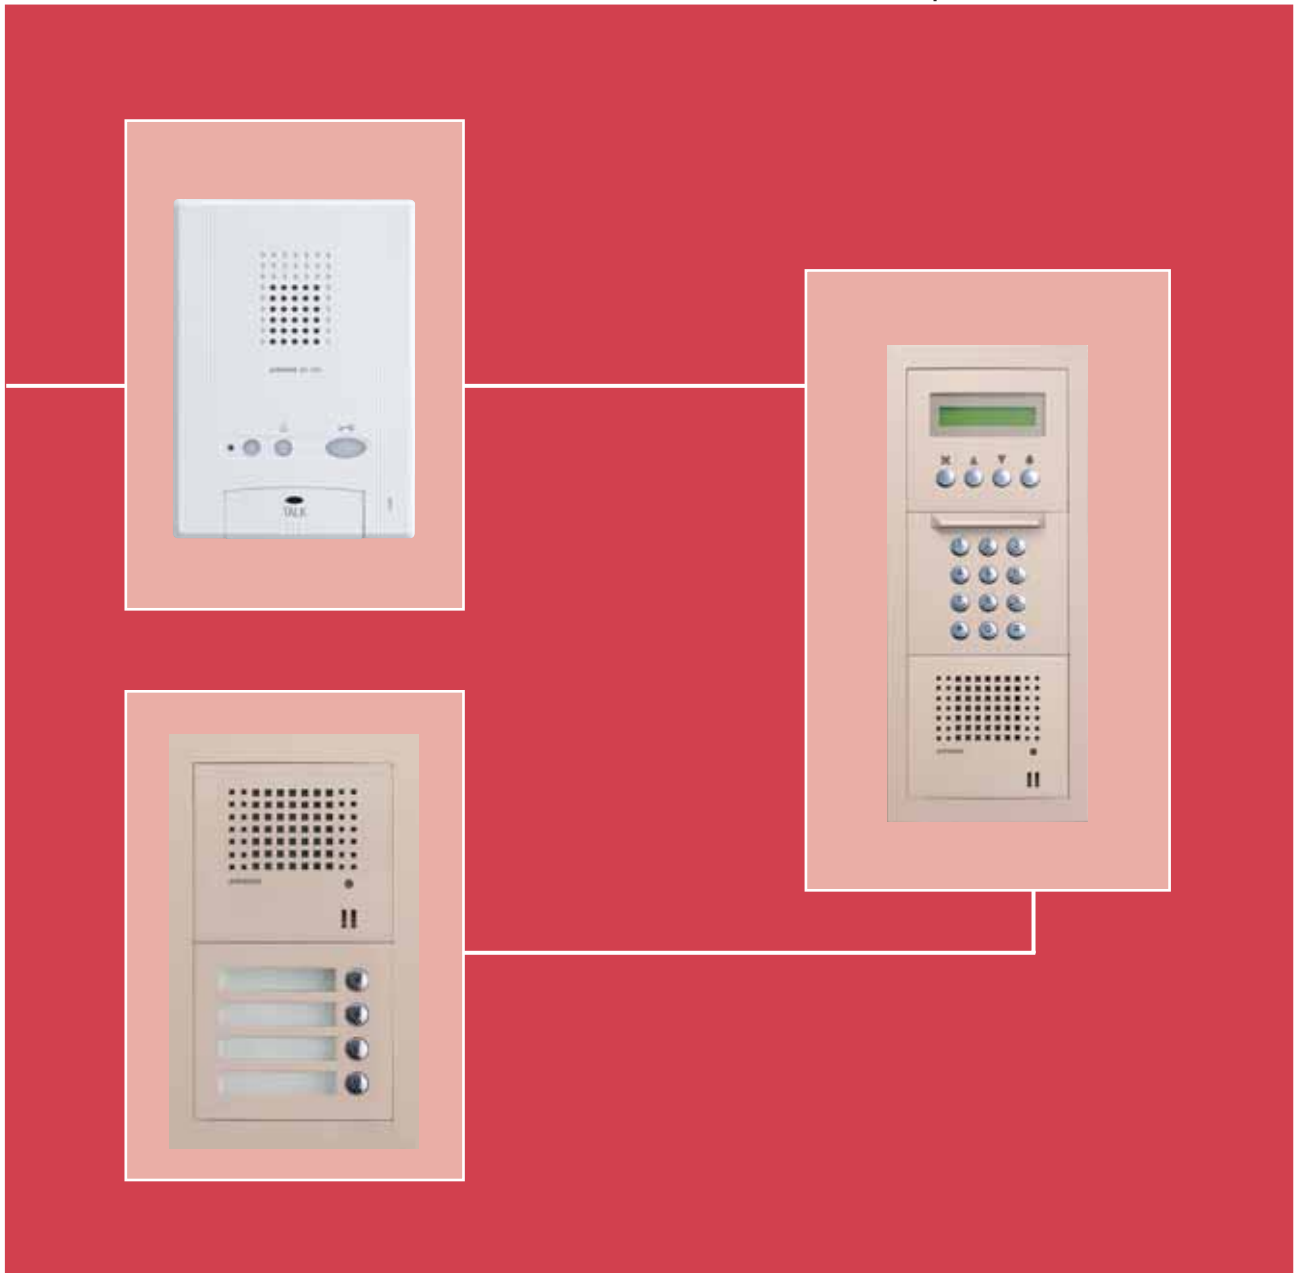

Audio Apartment Security Intercom

Two Wire Digital Audio Apartment Intercom

System Configuration

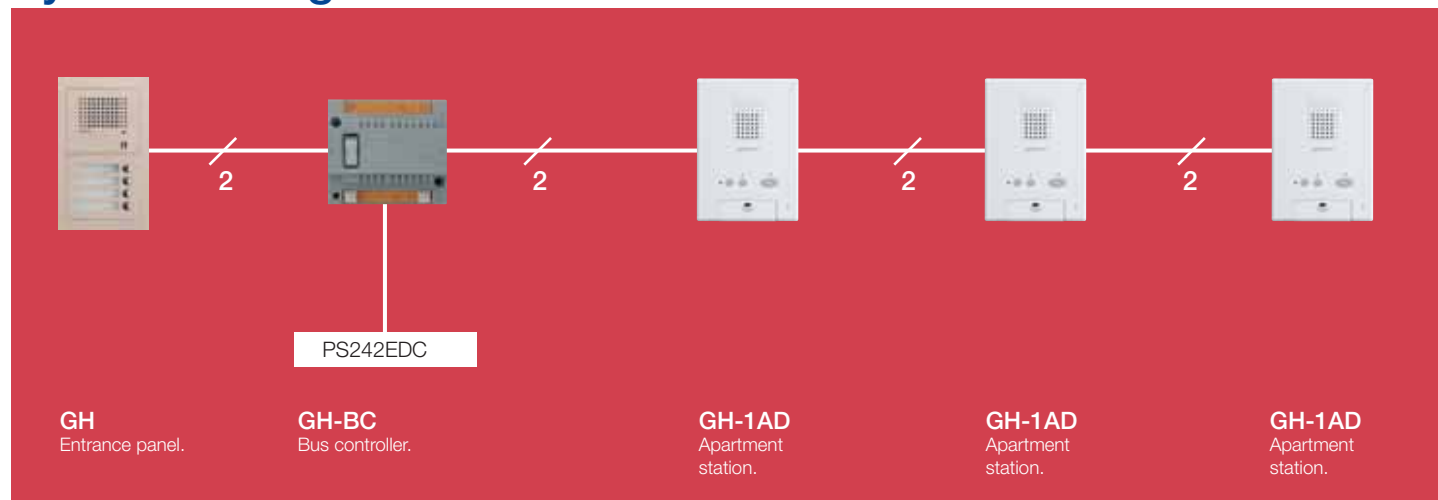

Features

- Hands free apartment stations.
 - Concierge or guard station call feature (requires GHMK Guard Station).
 - Up to 500 apartment stations.*
 - Up to 16 entrances.
 - Vandal resistant entrance stations.
 - Simple 2 wire installation.
 - Modular entrance stations.
 - Two additional buttons on apartment handset for control of additional door release or lift control (requires additional hardware).
 - Full privacy.
 - Doorbell option on apartment stations.
 - Up to 4 stations per apartment.
- * Digital name scroll module and keypad must be used on systems with over 100 apartment stations.

Cables

- 0.5 mm ~ 1.2 mm.
- PE (polyethylene) insulated and vinyl-sheathed cable. (KB wire).
- Solid copper conductor.

Specifications

Power Source	24 V DC, 0.9A, PS242EDC.	
Call-in	Electronic tone with adjustable volume.	
Door release	Contact rating: 4 amp, 24 volt.	
Wiring	2 parallel wires, non-polarised for communication bus. Each bus can support up to 50 GH-1AD handsets and 3 GH-DA entrance stations.	
Distance		
Diameter	0.5 mm	0.9 mm
GHBC to entrance	150 m	300 m
GHBC to last GH-1AD	150 m	300 m

Additional Options

GH-DA Audio module.	GF-2P 2 call panel.	GH-1AD Apartment station.	GF-3B Back box.
GH-DP Panel.	GF-3P 3 call panel.	GF-2F 2 module frame.	GF-BP Blank panel.
GH-NS Name scroll module.	GF-4P 4 call panel.	GF-3F 3 module frame.	EL9S Door release.
GF-NSP Panel.	GH-SW Call switch module.	GF-2B Back box.	GH-RY Light relay.
GF-1P 1 call panel.	GH-BC Bus controller.	PS242EDC 24V power supply.	
GH-MK Guard station.	GH-BCX Bus expander.		

Your local Aiphone reseller:

